


SMART RTD SLIDEWIRE TRANSMITTER

TTR200 TTR200X

- INPUT: MULTI TYPE RTD, SLIDE WIRE, RESISTANCE INPUTS
- ATEX AND IECEx APPROVED VERSION
- 22 SEGMENT USER LINEARISATION FOR INPUT
- SENSOR OFFSET AND OUTPUT ALIGNMENT
- ADJUSTABLE INPUT FILTER
- PROGRAMMABLE BURNOUT

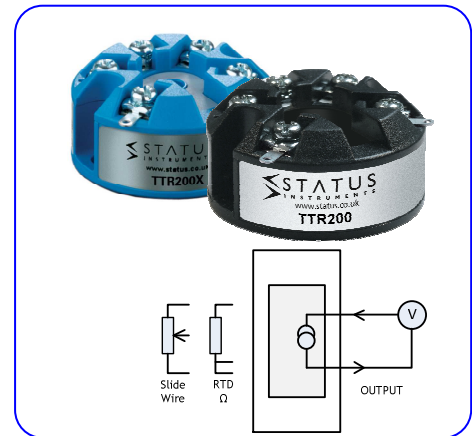


INTRODUCTION

The TTR200 'smart' transmitter is designed for use with RTD or Slidewire sensors. The flexible design allows the use of any resistive sensor within the range of (10 to 10500) Ω . Pt100, 500, 1000, Ni or Cu sensors as well as slide wire sensors up to 100 K Ω can be accommodated. Other sensor characteristics or your own 22-point linearization characteristic (for slidewire or linear resistance) can be downloaded into the product enabling you to adapt it exactly to your application. The TTR200X is approved to ATEX and IECEx standards allowing for use in hazardous area applications.

PC configuration allows the user to select Sensor type, Range, Filter, Tag, Units and error signal without requiring calibration equipment. Additionally, the user may read live process data when connected to the PC, this allows for sensor offset, and output alignment calibration, where the user can enter values to match the actual process and therefore reducing system errors.

If required, the desired range can be specified at the time of order, removing the need for user configuration. If the range is not specified then the transmitter will be shipped with the default range of Pt100 (0 to 100) $^{\circ}\text{C}$, burnout high and filter off.

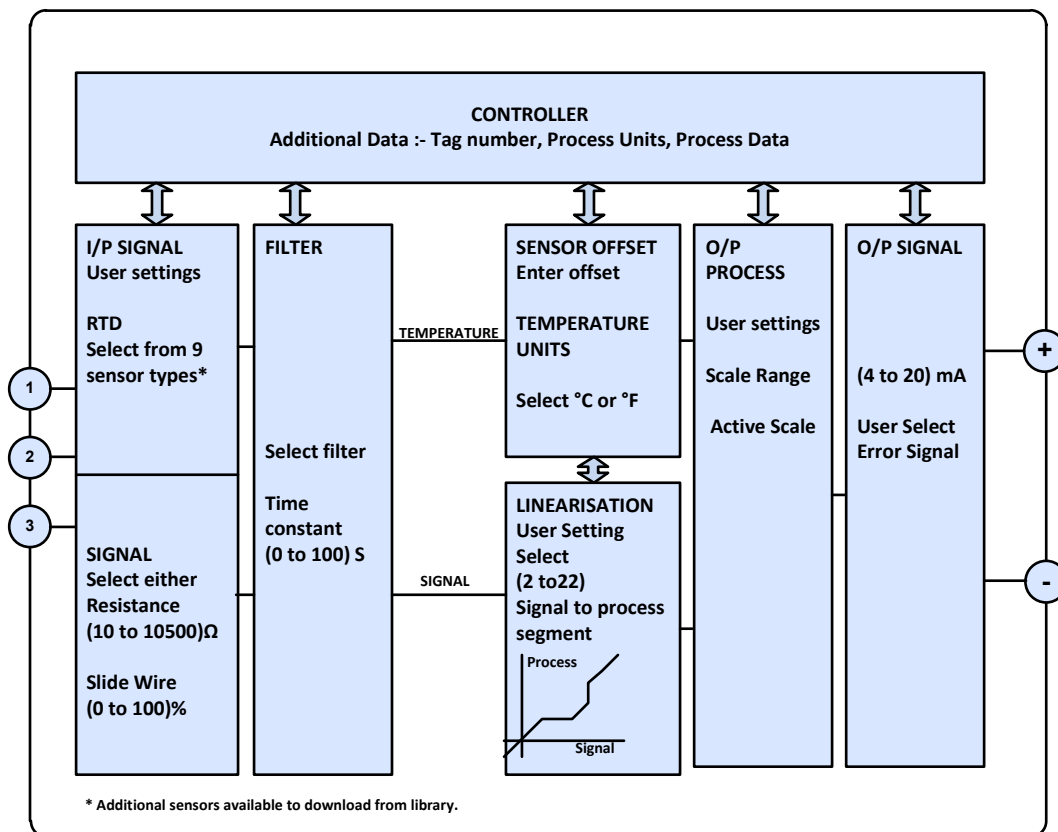

SMART RTD SLIDEWIRE TRANSMITTER

SPECIFICATION @20 °C

RESISTANCE RTD INPUT

Standard RTD
Slide wire
Resistance
Thermal Drift

Excitation current
Lead effect

Pt100, PT500, PT1000, Cu100, Cu1000, Ni100, Ni120, Ni1000, Cu53, library
Pot range (1 to 100) K Ω , Signal (0 to 100) %, accuracy 0.1 %
(10 to 500) $\Omega \pm 0.055 \Omega$, (500 to 2500) $\Omega \pm 0.5 \Omega$, (2500 to 10500) $\Omega \pm 10.0 \Omega$.
(0 to 500) $\Omega 0.013 \Omega/^{\circ}\text{C}$, (500 to 2500) $\Omega 0.063 \Omega/^{\circ}\text{C}$,
(2500 to 10500) $\Omega 0.27 \Omega/^{\circ}\text{C}$
< 200 μA
Max lead resistance 20 Ω per leg, Effect 0.002 $^{\circ}\text{C} / \Omega$

OUTPUT

Type
Range
Accuracy
Loop Effect
Max output load
Loop Supply

Two wire (4 to 20) mA current Loop
(4 to 20) mA; Upscale burnout 21.5 mA; Downscale Burnout 3.8 mA
(mA Out/ 2000) or 5 μA which ever is the greater, Drift 1 $\mu\text{A}/^{\circ}\text{C}$
 $\pm 0.2 \mu\text{A}/\text{V}$
TTR200 [(Vsupply-10)/20] K Ohms (Example 700 Ohms @ 24 V)
(10 to 30) VDC

SUPPLY

Range
Power

(10 to 30) VDC
< 1W Full Power

GENERAL

Accuracy
Response time
Connections

0.2 $^{\circ}\text{C}$ + ($\pm 0.05\%$ of reading) + (sensor)
Start up 5 seconds, Update 160 mS, Response 500 mS, Warm up 2 minutes.
Screw terminals 2.5 mm Maximum

USER INTERFACE

Type
Baud rate
Equipment

USB 2.0
1200 baud
PC running windows XP or later, USB configurator.

USER INTERFACE FUNCTIONS

Scaling
Filter
User Linearization (Profile)
Process Units
Temperature units
Tag Number
Process Output
User offset
Active scaling

User signal to process value scaling, for simplified setup.
Adjustable time constant (0 to 100) Seconds.
(2 to 22) segments mV to process.
4 Characters (signal input only)
 $^{\circ}\text{C}$ or $^{\circ}\text{F}$ (TC inputs only)
20 Characters
Range in process units
Enter sensor offset (Temperature mode only).
Set output process range against active sensor input

ENVIRONMENT

Operating Ambient
Storage Ambient
Configuration Ambient
Installation Enclosure

TTR200(-40 to 85) $^{\circ}\text{C}$; (10 to 90) %RH (non-condensing)
TTR200X Refer to user manual
(-50 to 85) $^{\circ}\text{C}$; (10 to 90) %RH (non-condensing)
(10 to 30) $^{\circ}\text{C}$
>= IP65.

APPROVALS

CE
BS EN 61326

MECHANICAL

Style
Diameter







Head mounted terminal block
43 mm diameter; 21 mm height Weight 31 g (encapsulated)

SENSORS RTD

Platinum IEC
Platinum IPTS-68
Ni100 DIN 0.00618
Ni 1000
Ni 507.5
Cu 53
Cu1000
Silicon

Pt100 (-200 to 850), Pt500 (-200 to 850), Pt1000 (-200 to 600)
Pt100 (0.00391) + Pt100 (0.00392) (-200 to 630)
(-60 to 180) Ni120 0.00672 (-70 to 180)
(-40 to 150) Ni1000 Tk5000 (-40 to 150)
(-80 to 360) Ni 604 (-200 to 200)
(-40 to 180) Cu100 0.00427 (-80 to 260)
(-80 to 260)
KTY81-110 -120-121-122-150-210-220-221-222-250 (-55 to 175)
KTY82-110 -120-121-122-150-210-220-221-222-250 (-55 to 175)
KTY81-151, KTY82-151, KTY83-210-220-250-121-122 (-55 to 175)
KTY84-130-150 (-40 to 300)


TTR200 Connection

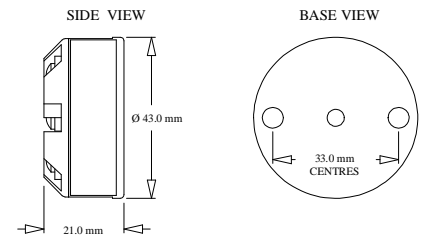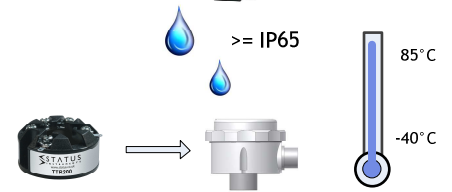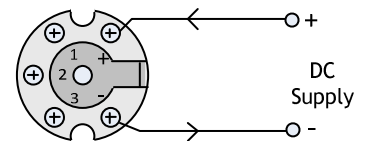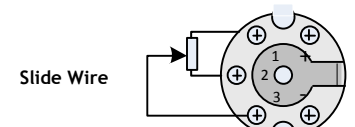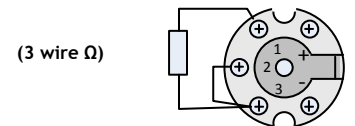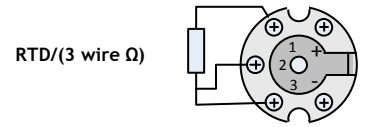

TTR200X ATEX / IECEx VERSION



Please refer to user manual document D2504_01 available at www.status.co.uk for details of the TTR200X ATEX / IECEx specification and the special conditions for safe use.

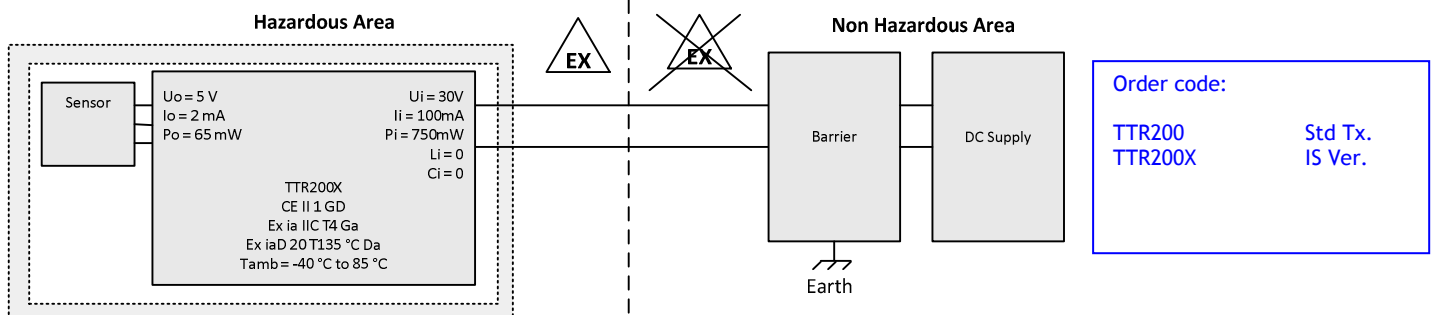

The data in this document is subject to change. Status Instruments assumes no responsibility for errors.

Status Instruments Ltd
Status Business Park
Gannaway Lane, Tewkesbury
Gloucestershire, UK
GL20 8FD

Tel: +44 (0)1684 296818
Fax: +44 (0)1684 293746
Email: sales@status.co.uk
Website: www.status.co.uk
D2537-01-05 CN5467 TTR200 Data Sheet.doc

