

SEM1605P RTD DIN RAIL TEMPERATURE TRANSMITTER

- **PT100, Cu100, Cu53, Ni100, Ni120**

- **(4 to 20) mA TWO WIRE OUTPUT**

- **USER OUTPUT TRIM (ZERO and SPAN)**

- **PC CONFIGURATION USING USB PORT**

- **LIVE DATA CAN BE VIEWED ON AN ANDROID PHONE OR TABLET**

➤ INTRODUCTION

The SEM1605P is the next generation DIN rail mounted temperature transmitter from Status Instruments. It has been designed to accept most common RTD temperature sensor inputs and provide the user with a standard two wire (4 to 20) mA output signal. All temperature ranges are linear to temperature.

Designed for ease of use, our latest USB interface is fitted for quick and easy configuration. Just connect a standard USB cable between the SEM1605P and your PC. Our free configuration software will guide you through any changes you wish to make. To further help save time, the SEM1605P does not need to be wired to a power supply during the configuration process, it is powered via the USB interface from your PC.

➤ FEATURE HIGHLIGHTS

ACTIVE RANGE The SEM1605P is provided with a user push button ranging option, allowing adjustments at both 4 mA and 20 mA for a live value.

The 'user adjust' function can be locked during configuration if not required. The state LED indicates out of range input during normal operation, during 'user adjust' it is also used to indicate the stage of adjustment.

(4 and 20) mA TRIM The buttons can also be used for 4 mA and 20 mA current trim adjustment to add small offsets to (4 or 20) mA output.


SENSOR REFERENCING The SEM1605P sensor referencing via the Windows based USBSpeedlink software allows for close matching to a known reference sensor eliminating possible sensor errors.

SENSOR BURN OUT DETECTION If a sensor wire is broken or becomes disconnected the SEM1605P output will automatically go to its user defined level (upscale or downscale) or a pre-set value.

STABILITY The SEM1605P DIN rail transmitter incorporates the latest digital technology to ensure accurate low drift performance.

USB PC CONFIGURATION The SEM1605P is quick and easy to configure using a standard-type USB lead and the free-of-charge USBSpeedLink Windows software.

USB ANDROID VIEW The SEM1605P can be connected to an android phone or tablet using an OTG USB adaptor. Running a free App, the Android device can then be used to view live data from the SEM1605P

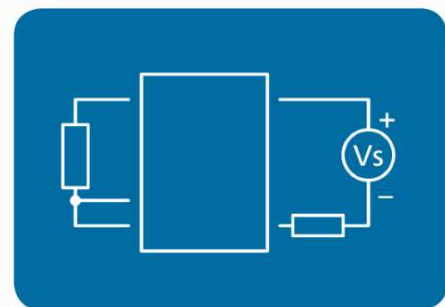

SEM1605P RTD DIN RAIL TEMPERATURE TRANSMITTER

SENSOR INPUT SPECIFICATIONS @20°C RTD		
Type	Range	Accuracy/ Stability
PT100 (IEC)	(-200 to 850) °C	0.2°C + (°0.05% of reading) Plus sensor error
PT100 0.391	(-200 to 630) °C	
PT100 0.392	(-200 to 630) °C	
PT100 0.393	(-200 to 630) °C	
Cu53	(-40 to 180) °C	
Cu100	(-80 to 260) °C	
Ni100	(-70 to 180) °C	
Ni120	(-70 to 180) °C	
Excitation current		660 uA
Maximum lead resistance	2 or 3 wire	20 Ω
Thermal stability		± 0.02 °C / °C

OUTPUT SPECIFICATIONS @20°C		
Type/ Function	Range/ Description	Accuracy/ Stability/ Notes
Two wire current	(4 to 20) mA	(mA output /2000) or 5 uA (Whichever is the greater)
Thermal drift	Zero at 20°C	2 uA /°C
Maximum output current	21.5 mA	In high burnout condition
Minimum output current	< 3.9 mA	In low burnout condition
Loop voltage effect		0.2 uA / V
Maximum output load	[(V supply – 10)/20] KΩ	700 Ω @ 24 V DC
Loop supply	(10 to 30) V DC	SELV
Power		< 1 W full power
Thermal stability		± 2 uA/ °C

USB USER INTERFACE		
Type/ Function	Range/ Description	Notes
Configuration hardware		USB A to mini B lead
Configuration software	USBSpeedLink	Download www.status.co.uk
Sensor configuration	Sensor type	RTD list
	Temperature range for (4 to 20) mA retransmission	°C or °F Active or manual range
	Sensor offset	±10 °C or ±18°F
	Burnout current	Upscale, downscale or user set
Pre-set temperature (diagnostics)	Any within sensor range	°C or °F
Pre-set output current (diagnostics)	Any within output range	mA
Tag		20 characters
Button function		Trim, active range, off
Read live data	Temperature Output	°C or °F mA
Save/ open configuration	To/ from PC file	

SEM1605P RTD DIN RAIL TEMPERATURE TRANSMITTER

ANDROID USER INTERFACE		
Type/Function	Range/Description	Accuracy/Stability/Notes
Hardware	USB Lead	OTG plus A to Mini B
Software	USBVeiwLink	Download from Google play store
Read live data	Input signal Output value	°C, °F mA

USER PUSH BUTTON INTERFACE		
Function	Description	
Active range	Range 4 mA and 20 mA points against live input	
User trim	Adjust at maximum and minimum input range value	Offset (4 mA) and span (20 mA) adjustment

GENERAL	
Function	Description
Update time	500 ms
Response time	1 s
Start-up time	8 s
Warm up time	120 s to full accuracy
Default configuration	PT100 (0 to 100) °C, upscale burnout
LED (red)	If mA output < -0.1% or > 100.1 % LED ON
Protection	Reverse connection


ENVIRONMENTAL	
Function	Description
Ambient temperature	Operating (-30 to 70) °C Storage (-40 to 85) °C
Ambient Humidity	Operating/Storage (10 to 90) %RH non-condensing
Protection requirement	Device must be installed in an enclosure offering >IP65 Protection
USB configuration ambient	(10 to 30) °C

MECHANICAL	
Function	Description
Dimensions	17.5 mm width, 56.4 mm depth from rail, 90 mm height
Enclosure	DIN rail mount
Material	Polymide 6.6 self-extinguishing: Grey
Connections	Screw terminals 2.5 mm wire maximum
Weight	60 g approximate

APPROVALS	
EMC	BS EN 61326: Note - Sensor input wires to be less than 30 m to comply
Ingress protection	BS EN 60529
RoHS	Directive 2011/65/EU

SEM1605P RTD DIN RAIL TEMPERATURE TRANSMITTER

Mechanical

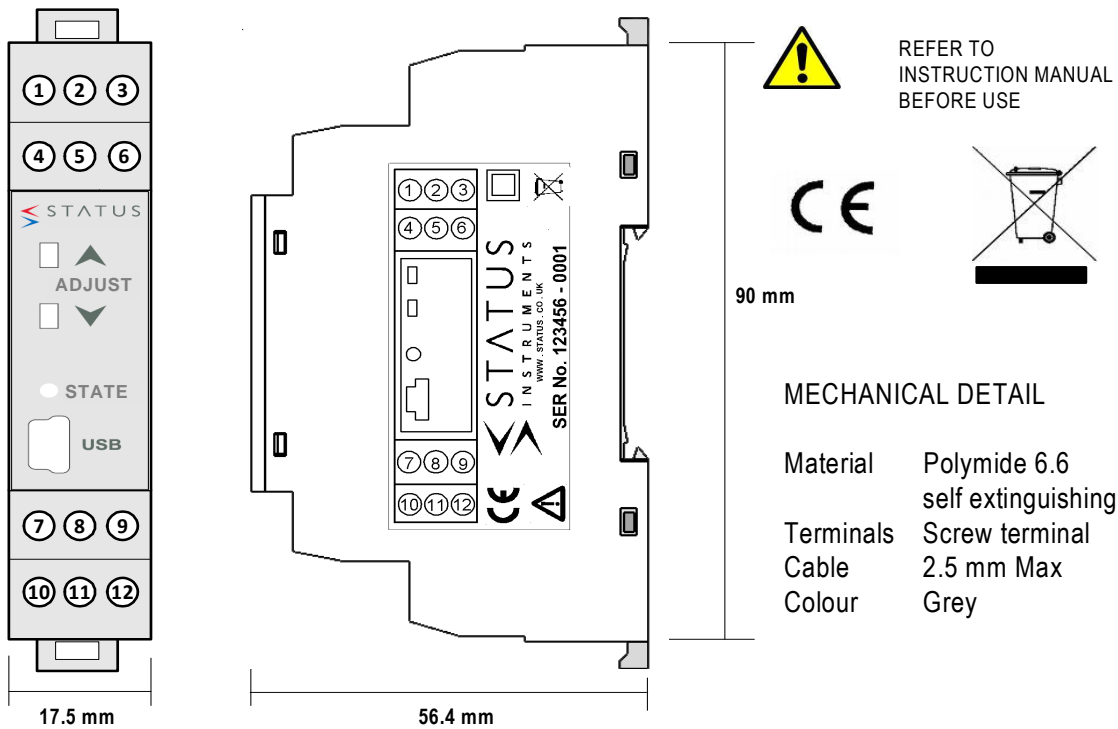

ORDER CODE

SEM1605P

ACCESSORIES

USB configuration software	USBSpeedLink free of charge from www.status.co.uk
Android live data view	USBViewLink (free of charge from Google play store)
Probe options	Refer to www.status.co.uk
USB Leads	Contact sales@status.co.uk

To maintain full accuracy annual calibration is required contact support@status.co.uk for details
The data in this document is subject to change. Status Instruments assumes no responsibility for errors

Status Instruments Ltd
Status Business Park
Gannaway Lane, Tewkesbury
Gloucestershire, UK
GL20 8FD

Tel: +44 (0)1684 296818
Fax: +44 (0)1684 293746
Email: sales@status.co.uk
Website: www.status.co.uk

