

SINGLE CHANNEL TEMPERATURE DATA LOGGER

Miniature

SL52T BUTTON DATA LOGGERS LOGGERS

Sample Rates from 2 seconds to 24 hours

Monitor from -40°C to +85°C

www.signatrol.com

Self Contained Temperature Data Logger

Splashproof

TempIT Compatible

INTRODUCTION

The SL52T is a self contained single channel temperature data logger with the ability to record up to 8,000 data points. The SL52T will measure from -40°C to +85°C with a typical accuracy of $\pm 0.5^\circ\text{C}$. They are very small (about the same size as a watch battery) which enables them to be inserted into small items and packages. The main advantages over the SL51T are the larger memory, faster sample rates and higher accuracy.

The SL50R Button Reader™ interfaces to the RS232 or USB port of a PC and is totally compatible with the TempIT-lite operating software which enables the logger to be set up and the data read and displayed in graphical format. Data can be stored and retrieved at a later time. The software can be up-graded to TempIT-Pro which provides various additional features such as data table view, export data to spreadsheet, email graphs, and automated MKT, FO, AO and PU Calculations etc.



SPECIFICATIONS

Description	SL52T
Sensor - Internal Temperature Sensor	-40°C to +85°C
Sensor Accuracy	$\pm 0.5^\circ\text{C}$ from -10°C to +65°C See Graph Overleaf For Temperatures Outside This Range
Battery Life	See Graph
Sample Rates (User Selectable)	2 seconds to 24 hours* ¹ & ²
Memory Size	8192 - Low Resolution Mode 4096 - High Resolution Mode
Battery	3.0V Lithium: Non Replaceable
Resolution	8 Bit - Low Res Mode (0.5°C) 11 Bit - High Res Mode (0.07°C)
Response Time	Typically 90 seconds in circulating air
Size	17mm Diameter x 6mm Height
Case Material	305 Stainless Steel
Weight	4 grams
Sealing	IP55 - Water Resistant <small>See protective enclosures for waterproof applications.</small>
Communication	RS232 Serial or USB
Clock Accuracy	± 2 Minutes per Month
Sampling Methods	Continuous (First in First Out) or Stop When Full* ²
Alarms	High and Low
Start Delay	Up to 12 months, 1 Minute Resolution
Start on Alarm	Yes
Owner Manifest Data	Up to 32 Characters
User Manifest Data	Up to 64 Characters

*Notes:

1. Sample rate affects battery life as does high temperature exposure - see charts overleaf
2. "Stop when full" is the only option for sample rates less than 1 minute
3. Resolution is programmable as 8 or 11 bit. More data is stored in 8 bit mode and battery life is enhanced
4. Application pending
5. With ambient temperature less than 50°C

Signatrol.com
Data Logging Solutions

Computer Requirements

Operating System: Windows 2000, WinXP or Vista32.


IBM PC or compatible computer 500 MHz (1GHz recommended) with 256MB Ram (512MB Recommended)

Software Requirements

TempIT-Lite (free from Signatrol website: www.signatrol.com) or TempIT-Pro

Error Curve

The SL52T actual error depends upon the ambient temperature according to the following graph:

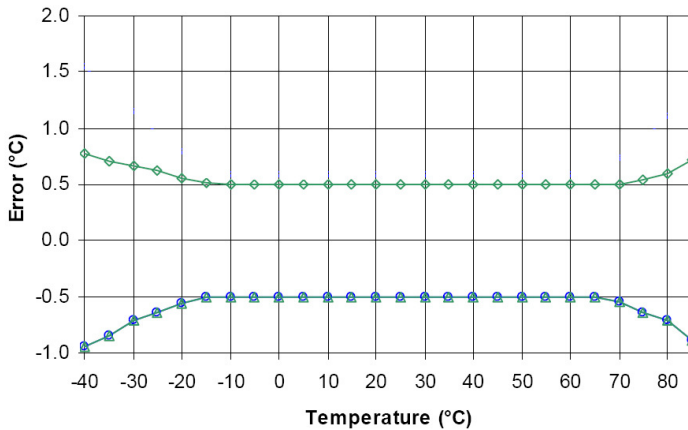


APPLICATIONS

Food processing verification, pharmaceutical storage, laboratories, transportation of temperature sensitive goods, equipment run time, HVAC system testing and balancing, etc.

Battery Life

Battery life is considerably shortened by fast logging and at temperatures in excess of 45 °C. The following graphs show the effect of temperature on the product life of the SL52T.

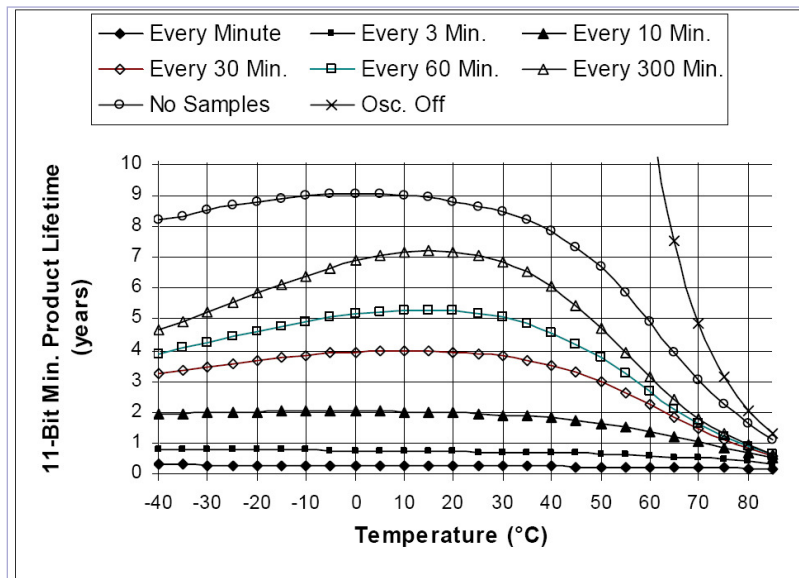

SL52T Battery life, in years.

ORDER CODE

SL52T Data Logging button -40°C to +85°C

STARTER KITS

SL52 - KIT - [] - []

Interface:
USB - USB Interface
232 - RS232 Interface

Number of Data Loggers:
2, 3, 4 or 5

SOFTWARE

TempIT-Lite Operating Software (Free from website)
TempIT-PRO Standard Operating Software

ACCESSORIES

SL50-INTERFACE-USB USB Interface cable
SL50-WALL Wall Mounting Bracket - Pack of 5
SL50-CLIP Plastic Snap-in Fob - Pack of 5